

SEM370 Series WIFI APP Setting

*The Smartphone must use 2.4G WIFI before setting.


*MYWATTPRO APP open.

*Sign Up ID: Use your Email address, PW: more than 5 number with an alphabet.

*LOGIN with you're the above registered ID.

*Choose "Add new device" and select SEM360.


*Before you select SEM360, please do WIFI line selection as below photo.

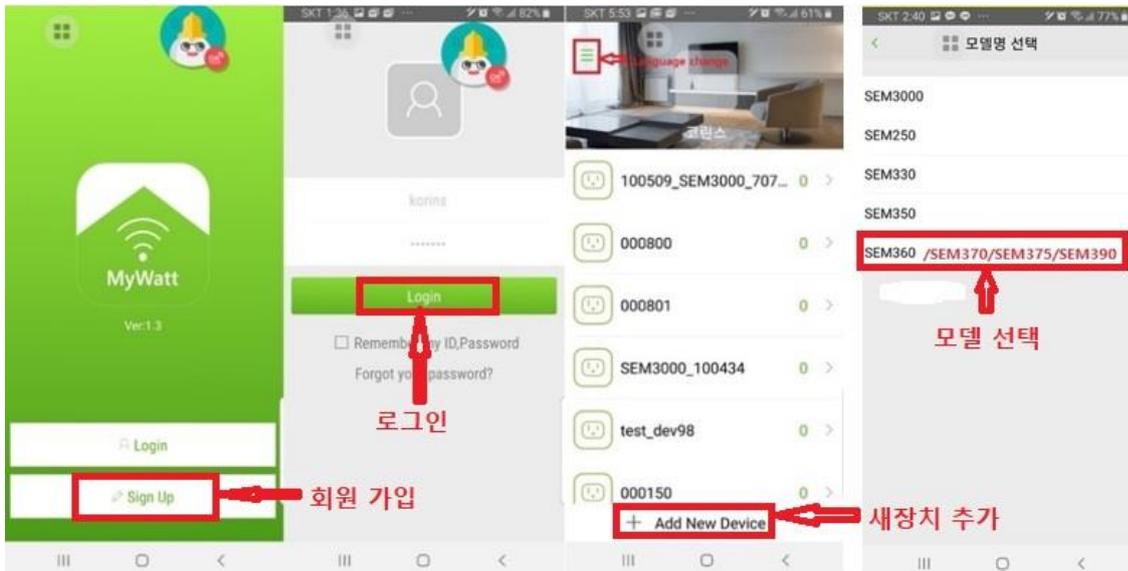

*Move to Smartphone WIFI page and check the WIFI line is 2.4G type(example: KT_GIGA_Wave2).

If yes, please select your SEM370 Series Serial Number (SEM370_XXXXXX) from the WIFI menu.

Please also write "korins1234" as an official password.

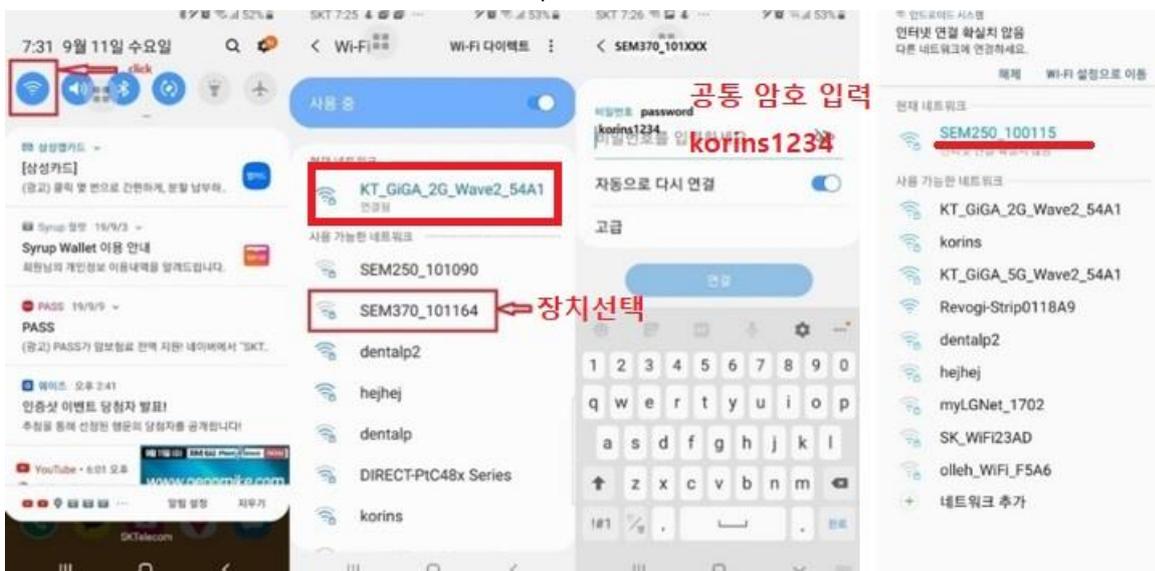

*Please go to Model selection menu and select "SEM360".

*Go to "Choose your network" and write your SSID (example: KT_GiGA_2G) name and password.
(If you can find your used SSID number and password from smrtphone, please slect it.)


Please press "Next" and your App will search and do pairing with your device(SEM370_XXXXXX).

*10 to 30 seconds pairing processing, you will get the following result:

(01) Failure: Please try the pairing process once again. Or Please check that the SSID number is corrcct or not.

(02) Success: It is okay. You already have connected to the web cloud successfully.

Before you see the (02) message, you could see the sign from SEM370 wifi led lamp brinking will stop and show you fixed yellow led lamp lighting instead of brinking.

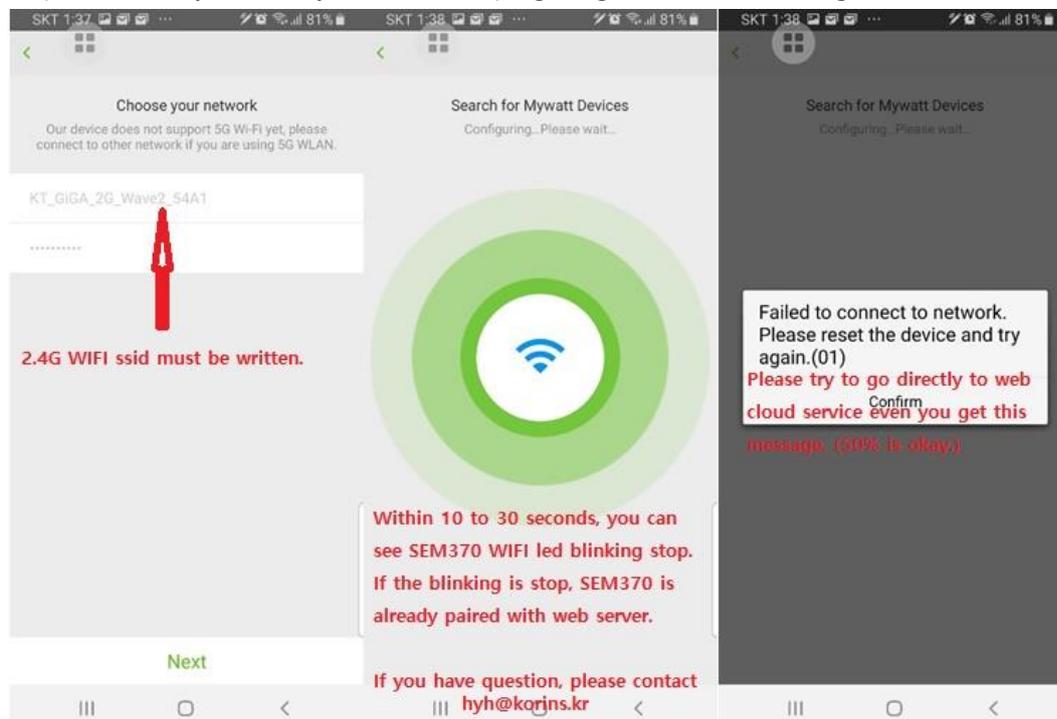

Please go to the following web cloud site:

<http://mywatt.xyz/account/login.php>

Please log in with your ID and Password which we already have noticed to you with written paper together with commmodity package.

If you have problem, please contact o David Hong/Korins by email or phone.

Phone: +82-10-8905-1244

Email: hyh@korins.kr

Website: www.mywatt.biz